


## Reflector 3

Reflector 3 is a 3 mm thin sheet of insulating material of extruded polystyrene.

Reflector used as Underlay for AluMat Underfloor Heating, wood, parquet and laminate flooring. Reflector reduce sound and take up to 2.2 mm unevenness on the subfloor surface.

Reflector also available in 6 mm thickness.

Reflector is sold only in packages of 6 m<sup>2</sup>.

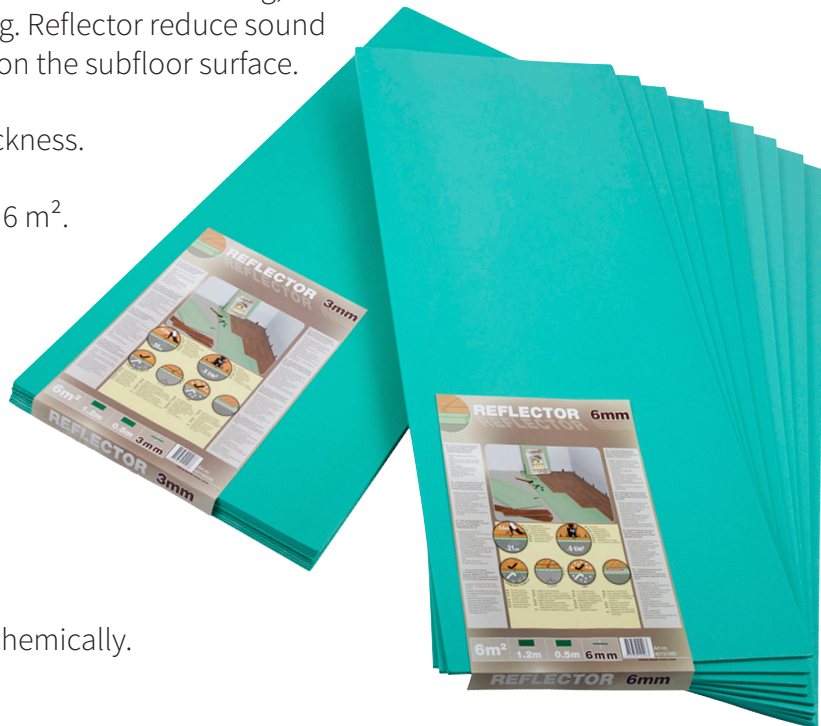

### Important!

Do not install together with PA, ie. nylon, as these materials reacts chemically.

## Technical Data



Material	Extruded Polystyrene / XPS
Dimensions (H,W,L)	3 x 500 x 1200 mm
Weight	150 g/m <sup>2</sup>
Density (EN ISO 845)	40 kg/m <sup>3</sup>
Moisture protection (vol. %)	0,08 %
Load	9 t/m <sup>2</sup>
U-value	9,26 W/m <sup>2</sup> K
Max. temperature	80 ° C
Sound reduction	22 dB
Warranty	10 years
Standard	CE

## Reflector 3

Item	Type	Description	Height	Width	Length
40101030	RF3	Reflector 3 mm (sold in 6 m <sup>2</sup> packages only)	3 mm	500 mm	1200 mm

### Important!

Do not install together with PA, ie. nylon, as these materials reacts chemically.